


- EXTRUDED ALUMINUM FRAME, VERTICAL FRONT BLADES, EACH ADJUSTED BY HAND
- HORIZONTAL DAMPER BLADES BEHIND THE FRONT BLADES, OPENED AND CLOSED BY A LEVER AT THE FACE
- CORROSION RESISTANT - RUST PROOF
- MOUNTING HOLES: 2 ON 4" TO 10" HIGH, 4 ON 14" HIGH, 6 ON 18" HIGH; SCREWS INCLUDED
- FINISH: WHITE

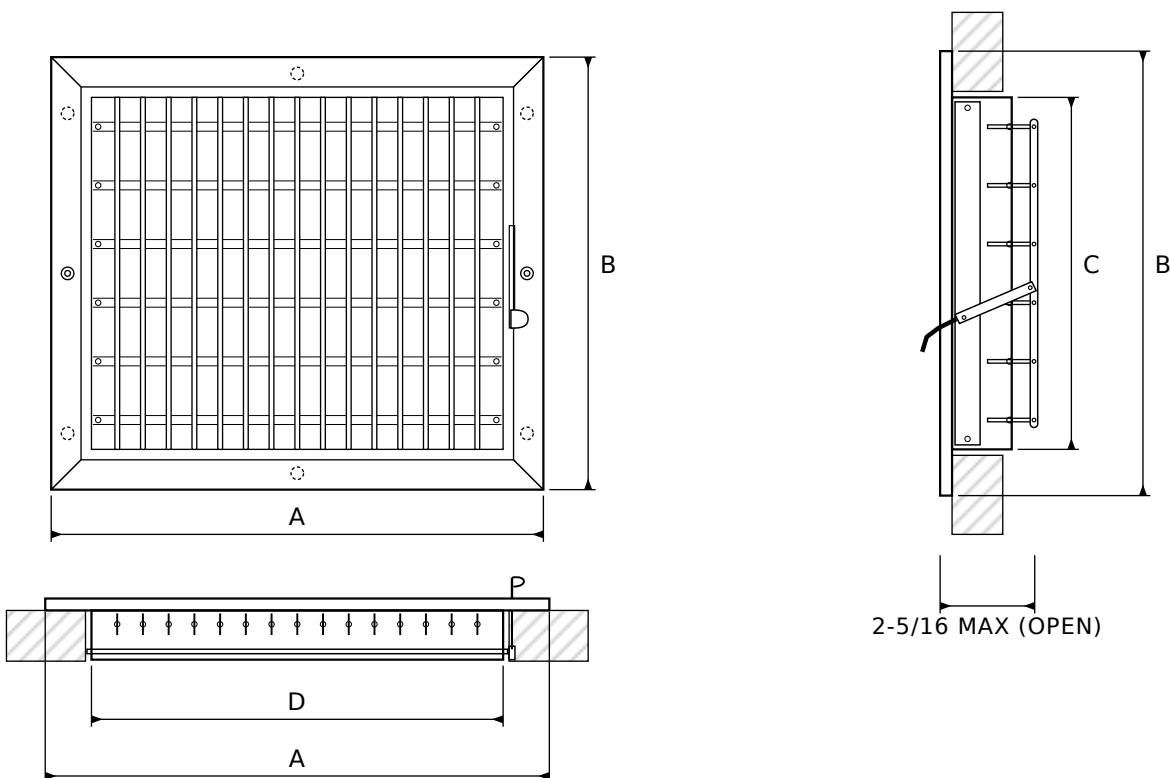

DIMENSIONS (INCHES)

SIZE W x H	A	B	C	D	SIZE W x H	A	B	C	D
6 x 4	7-3/4	5-3/4	3-3/4	5-3/4	16 x 4	17-3/4	5-3/4	3-3/4	15-3/4
6 x 6	7-3/4	7-3/4	5-3/4	5-3/4	16 x 6	17-3/4	7-3/4	5-3/4	15-3/4
10 x 6	11-3/4	7-3/4	5-3/4	9-3/4	16 x 8	17-3/4	9-3/4	7-3/4	15-3/4
10 x 8	11-3/4	9-3/4	7-3/4	9-3/4	16 x 10	17-3/4	11-3/4	9-3/4	15-3/4
12 x 4	13-3/4	5-3/4	3-3/4	11-3/4	18 x 6	19-3/4	7-3/4	5-3/4	17-3/4
12 x 6	13-3/4	7-3/4	5-3/4	11-3/4	18 x 18	19-3/4	19-3/4	17-3/4	17-3/4
12 x 8	13-3/4	9-3/4	7-3/4	11-3/4	20 x 4	21-3/4	5-3/4	3-3/4	19-3/4
12 x 10	13-3/4	11-3/4	9-3/4	11-3/4	20 x 6	21-3/4	7-3/4	5-3/4	19-3/4
14 x 6	15-3/4	7-3/4	5-3/4	13-3/4	20 x 8	21-3/4	9-3/4	7-3/4	19-3/4
14 x 8	15-3/4	9-3/4	7-3/4	13-3/4	24 x 8	25-3/4	9-3/4	7-3/4	23-3/4
14 x 14	15-3/4	15-3/4	13-3/4	13-3/4					

SIZE is the duct or wall opening. All dimensions in inches. Section shows the damper open: maximum depth 2-5/16. With the damper closed the depth is 1-3/4. Front view shows the 2-hole layout. Dashed holes: near the corners on 14 and 18 high; at the top and bottom center on 18 x 18 only. Airflow and effective area data are published under Performance Data on each product page at airgrilles.com.

JOB NAME: _____
 LOCATION: _____
 ARCHITECT: _____
 ENGINEER: _____
 CONTRACTOR: _____

SUBMITTED BY: _____

DATE: 09/21/2026 REV 0 AG-SD-0005

421108

Aluminum Adjustable Supply
 Register
 Sidewall & Ceiling