


- EXTRUDED ALUMINUM FRAME, INDIVIDUALLY ADJUSTABLE CURVED BLADES
- CORROSION RESISTANT - RUST PROOF
- HORIZONTAL DAMPER BLADES BEHIND THE FACE, OPENED AND CLOSED BY A LEVER AT THE RIGHT SIDE
- MOUNTING HOLES: 2 ON 4" TO 8" HIGH, 4 NEAR THE CORNERS ON 10" AND UP; SCREWS INCLUDED
- FINISH: WHITE

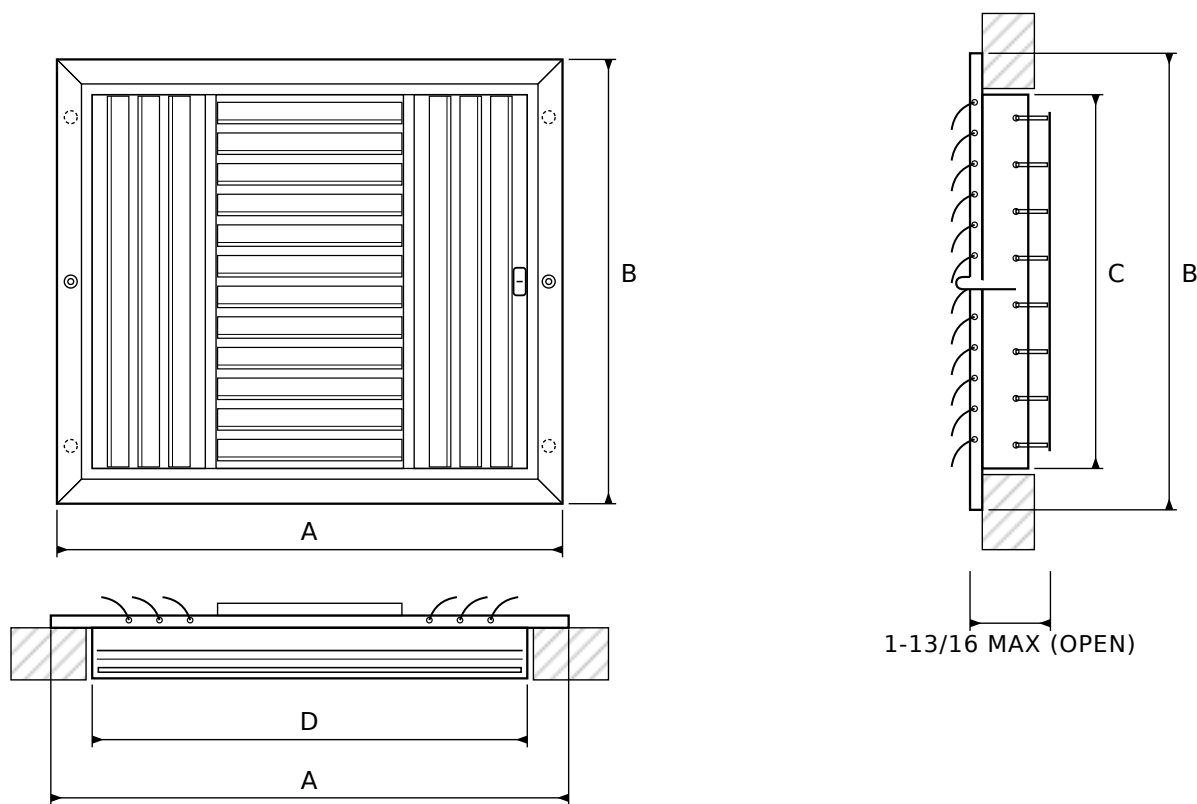

DIMENSIONS (INCHES)

SIZE W x H	A	B	C	D
6 x 6	7-3/4	7-3/4	5-3/4	5-3/4
8 x 4	9-3/4	5-3/4	3-3/4	7-3/4
8 x 6	9-3/4	7-3/4	5-3/4	7-3/4
8 x 8	9-3/4	9-3/4	7-3/4	7-3/4
10 x 4	11-3/4	5-3/4	3-3/4	9-3/4
10 x 6	11-3/4	7-3/4	5-3/4	9-3/4
10 x 10	11-3/4	11-3/4	9-3/4	9-3/4
12 x 6	13-3/4	7-3/4	5-3/4	11-3/4
12 x 8	13-3/4	9-3/4	7-3/4	11-3/4
12 x 12	13-3/4	13-3/4	11-3/4	11-3/4
14 x 6	15-3/4	7-3/4	5-3/4	13-3/4
14 x 8	15-3/4	9-3/4	7-3/4	13-3/4
14 x 14	15-3/4	15-3/4	13-3/4	13-3/4

SIZE is the duct or wall opening. All dimensions in inches. Section shows the damper open: maximum depth 1-13/16. With the damper closed the depth is 1-5/16. Front view shows the 2-hole layout; the dashed holes are the 4-hole layout on 10 high and up. Airflow and effective area data are published under Performance Data on each product page at airgrilles.com.

JOB NAME: _____
 LOCATION: _____
 ARCHITECT: _____
 ENGINEER: _____
 CONTRACTOR: _____

SUBMITTED BY: _____

DATE:
09/21/2026

REV 0

AG-SD-0020

210103

Three-Way Aluminum Adjustable
Curved Blade Register
With Damper, Sidewall & Ceiling